
DATA SHEET



EncasaCustomer Access Point





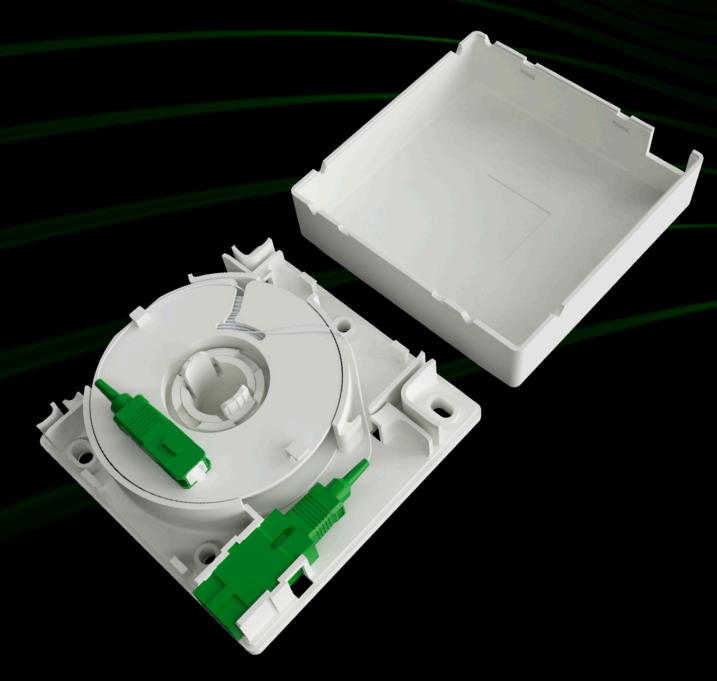


ENCASA CUSTOMER ACCESS POINT 30M SCA G.657.B3

PRODUCT OVERVIEW

The Excel Encasa discreet cabling solution has been designed for installation in any household or multidwelling application. The outlet's unique spooling mechanism houses 30 m of 900 μ m G.657.B3 micro-fibre, which can be discreetly deployed around the property's interior and retracted to eliminate any slack fibre.

This Encasa customer access point comes pre-terminated with SCA connectivity. Enhanced flexibility is achieved through multiple cable exit points around the enclosure, enabling connected fibre to be routed from the top, bottom, and sides of

fibre to be routed from the top, bottom, and sides of the access point.



The ability to remove the adapter from the base of the access point facilitates swift and effortless cleaning of all end faces, guaranteeing the highest quality installation.

FEATURES

- Suitable for internal use only
- 30 m of spooled fibre
- Pre-terminated SC/APC

- No splicing required
- Factory assembled
- G.657.B3 bend insensitive

GENERAL

Surface mounted	Yes
Type of connector	SC/APC simplex
Suitable for number of couplers	Single mode
Dimensions (mm)	85mm H x 85mm W x 26mm D
Material	ABS
Material colour	RAL 9003
Flammability	UL-94V0
Fibre colour	White
Tight buffer material	LSZH
Cable diameter	900 um
Bend insensitive	G.657.B3
Operating temperature	-25°C to 70°C




PRODUCT FEATURES



Adaptor Field



Fixing Points




Cable Storage Spool



Cable Exit Points

DIMENSIONS



Front View Closed



Side View



Rear View



Top View



Bottom View

PART NUMBER INFORMATION

Part Number	Product Description
900-099	Excel Encasa Customer Access Point with 30 m of G.657.B3 Fibre SCA



Excel House, Junction Six Industrial Park Electric Avenue, Birmingham, B6 7JJ

Phone: 0800 75 75 65 Email: FTTx@mayflex.com

www.excel-networking.com

find out all about:

EncasaCustomer Access Point





